

Solar Flood Light

Product Specification

Product Picture:



Features:

- * Die-casting aluminium lamp body
- * No ac power cables, no electricity charges
- * LED lumen 160lm/w
- * IP65 rating


Applications:

- * Plazas, courtyards
- * Factories, warehouses
- * Gardens, parks
- * Sporting venues


Product Parameter:

Model	0276A80-01	0276B160-01	0276C240-01
LED Type	80PCS 2835LED	144PCS 2835LED	252PCS 2835LED
Battery Type	LiFePO4 3.2V 6AH	LiFePO4 3.2V 12AH	LiFePO4 3.2V 18AH
Solar Panel Type	Polycrystalline 6V 8W	Polycrystalline 6V 12W	Polycrystalline 6V 18W
Color Temperature	3000K-6500K		
LED Lifespan	50000H		
Control Method	Long Bright + Body Induction		
Operating Temperature	-20°C ~ 60°C		
Storage Temperature	-30°C ~ 70°C		
Gross weight/Carton	18kg	19kg	26kg
Product Size	205*173*55mm	250*190*55mm	302*234*55mm
Outer Box Size	675*550*405mm 10Pcs/Box	680*545*405mm 8Pcs/Box	785*545*455mm 8Pcs/Box


Lighting Data:

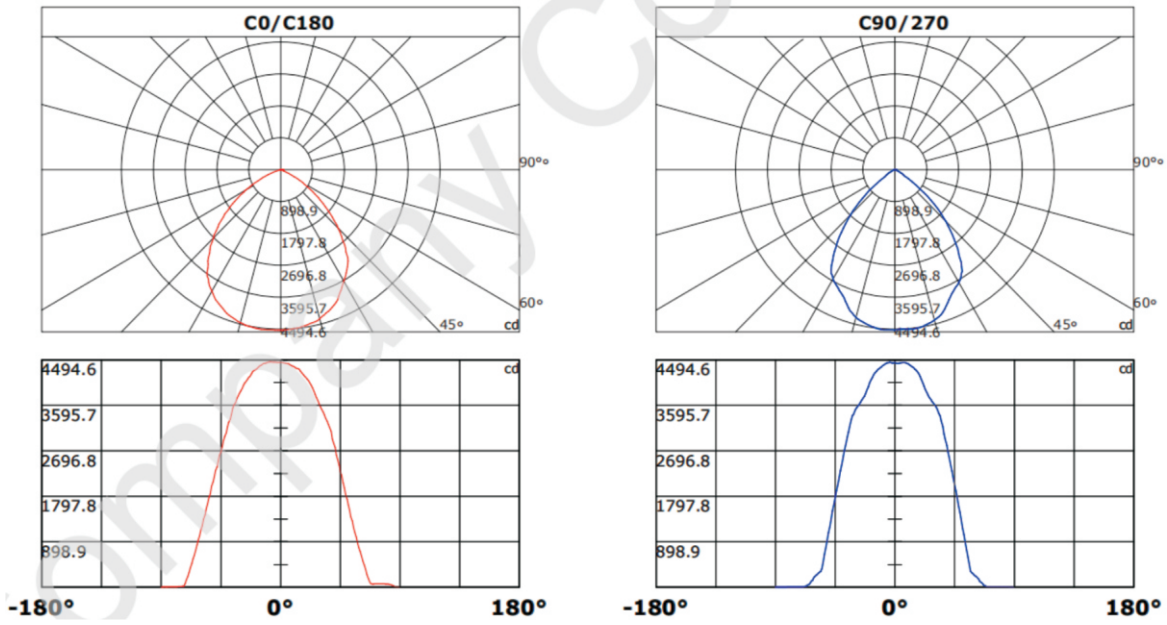

Installation Dimension:

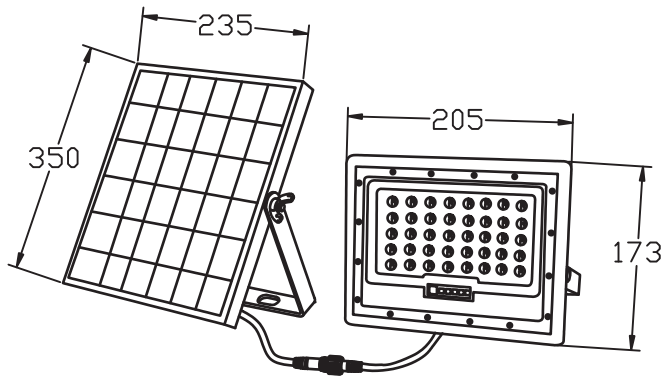


0276A80-01

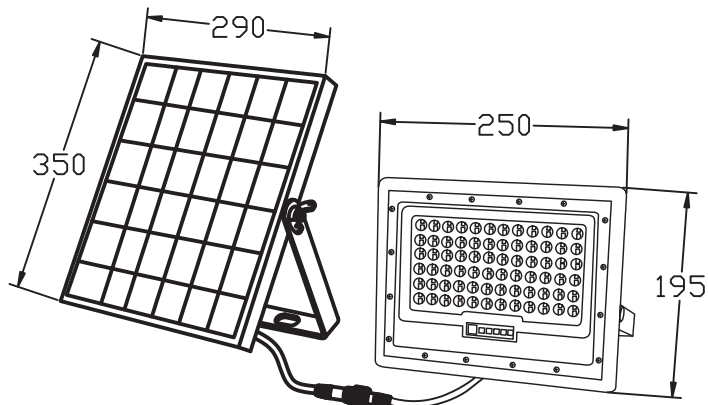


0276B160-01

Lighting Data:

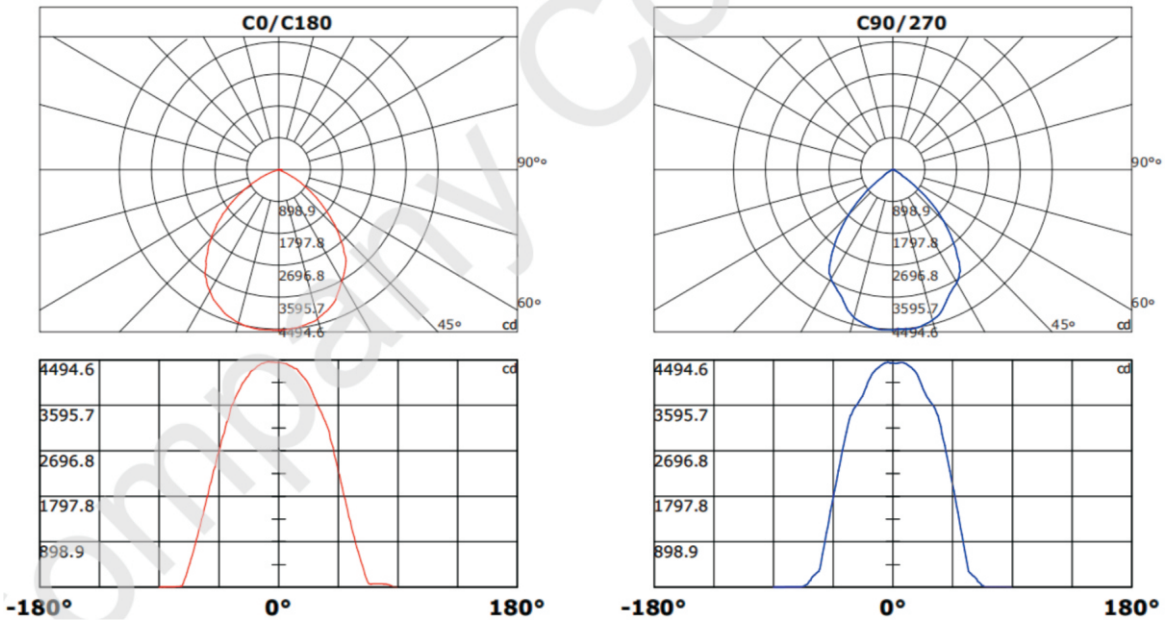

Installation Dimension:

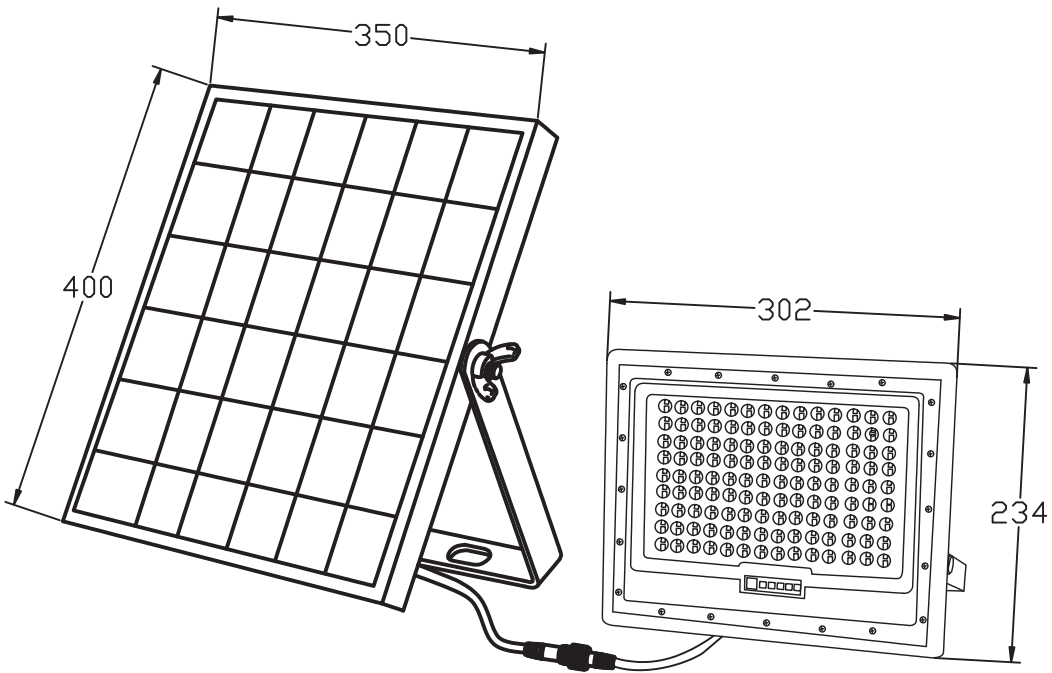

0276C240-01